

Yagi Antenna

890-960 Mhz, 14dBi Gain, Yagi Antenna

Product Description:

A Yagi antenna is a resonant fed dipole, the fed dipole is driven elements with one or more parasitic elements. It is a cost effective solution for point to point applications.

Applications:-

Used as a donor
Used as a link

Features:


More Power radiated in a given direction.
Highly directional.
Good VSWR.

Electrical Specifications:

Model No.	YA08014N01
Frequency Range (Mhz)	890-960
Return Loss (dB)	15
Power (Watts)	50
Impedance (ohms)	50
Gain (dBi)	14
Polarisation ration	Vertical / Horizontal
Front to Back ration (dB)	20
H.P.B.W (degree) Horizontal	60°

Mechanical Specifications:

Connector	N (Female)
Mounting Hardware Material	MS
Unit dimension (LXWXH)mm	1300 X 25 X 200
Unit weight (Kgs)	1.4
Unit Packed Dimension (LXWXH)mm	1350 X 220 X 50
Unit Packed weight (Kgs)	1.8

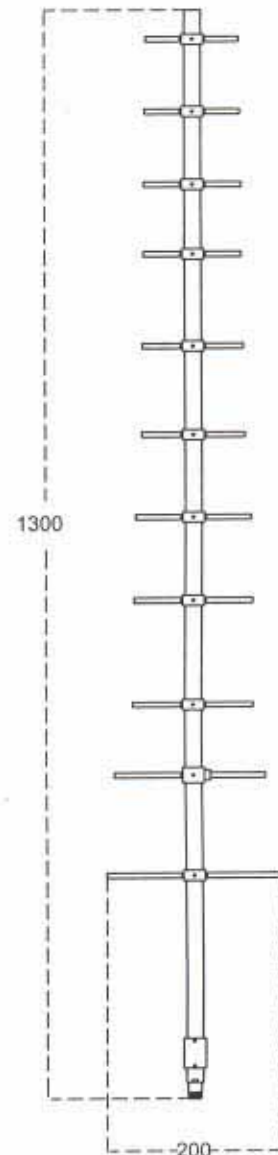

YA08014N01