

Patch panel ANTENNAS

2400-2500 Mhz, 22dBi Gain, Patch Antenna

Product Description:

Patch Antenna's are quite directional as they have most of their power radiated in one direction in both the vertical and horizontal planes. It's flat design provides high efficiency and low back lobes with minimal depth dimension.

Applications:-


Outdoor long range point to point connection.

Features:

Compact in Size
Field Proven
Easy to install
Cost effective
Linear Polarization

Electrical Specifications:

Model No.	PA24022N01
Frequency Range (Mhz)	2400-2500
Return Loss (dB)	>15
Power (Watts)	50
Impedance (ohms)	50
Gain (dBi)	22
Polarization ration	Horizontal / Vertical
Front to Back ration (dB)	>24
Horizontal Beam width	18°
Vertical Beam width	18°

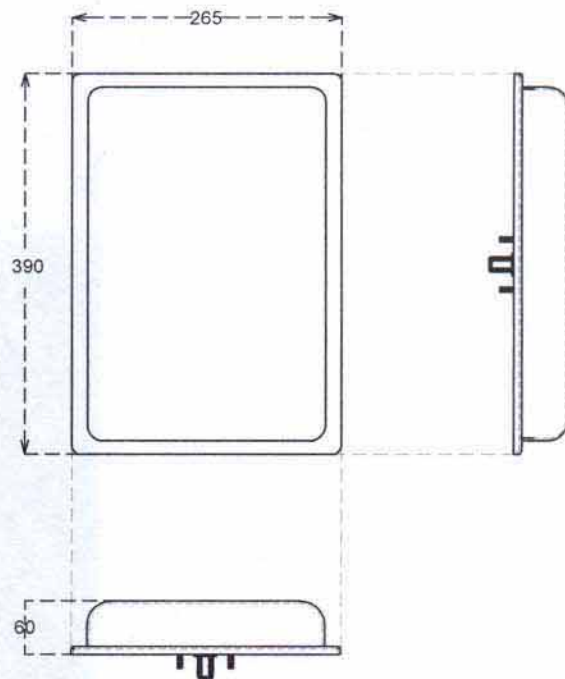

PA24022N01

Mechanical Specifications:

Connector	N (Female)
Mounting Hardware Material	MS
Unit dimension (LXWXH)mm	180X265X390mm
Unit weight (Kgs)	1.9
Unit Packed Dimension (LXWXH)mm	400X290X110mm
Unit Packed weight (Kgs)	2.3
Radome Material	ABS Glass filled with UV Protection

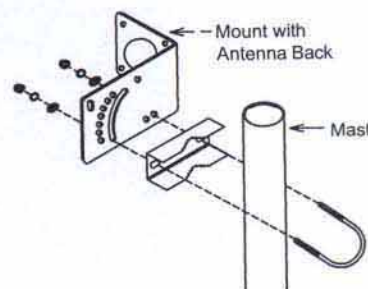


fig: Mounting Guide

Due to continuous improvement policy and efforts, dimensions are subject to change for further improvement.